



Installation Manual Double DIN Kit

Part-No.: 381170-13

1. Locate the factory wiring harness in the dash. Re-connect the negative battery terminal and test the unit for proper operation.

2. Slide the Double DIN head unit into the brackets and secure the Double DIN head unit to the assembly using the screws supplied with the radio. (Figure B)

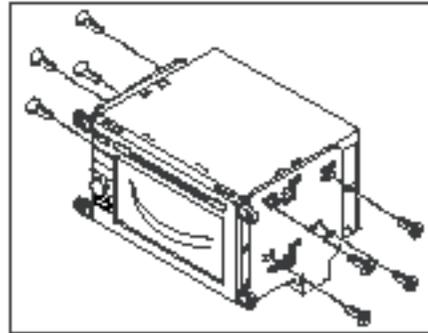


Figure B

3. Secure the radio housing brackets to the radio housing with four #8X3/8" Phillips screws provided. (Figure C)

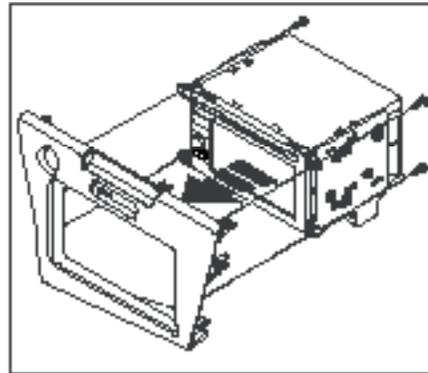



Figure C

4. Reassemble dash in reverse order of disassembly using the supplied #8 screw in place of the factory screw removed in step one, figure B of the dash disassembly.

• Mazda 5 2012->

Compatible with these Double-DIN devices:

Double-DIN Navigation

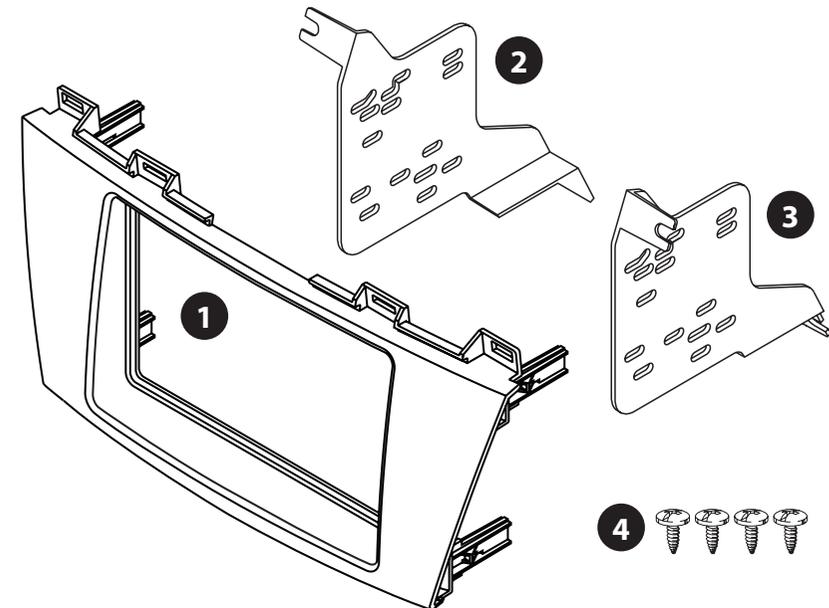


Double DIN Set contents
• (1) Facia Plate

- (2) Mounting bracket (L)
- (3) Mounting bracket (R)
- (4) Installation accessories


Installation Manual Double DIN Kit

2. Unclip and remove the small pocket panel on the back of the center console behind shifter. (Figure B)

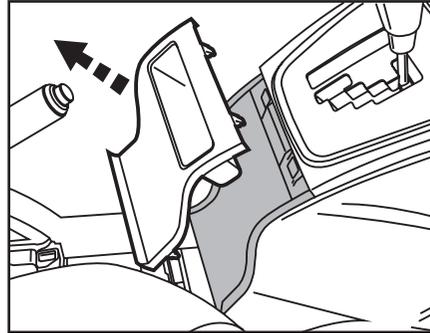


(Figure B)

3. Remove (2) 8mm bolts under cup holder panel holding the back half of the center console to the front half. (Figure C)

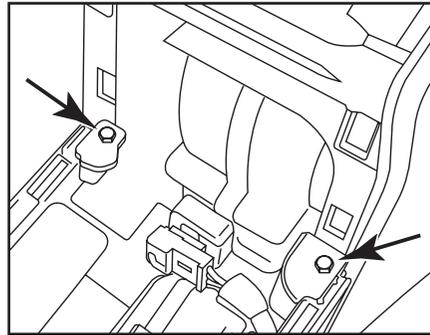


(Figure C)

4. Unscrew and remove the shift knob. (Figure D)

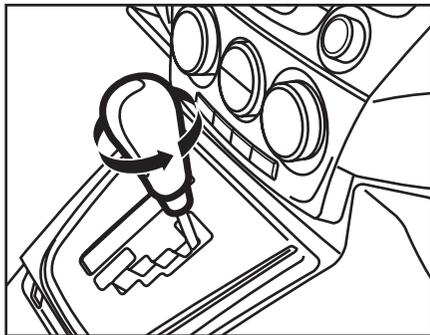

(Figure D)

Continued on next page

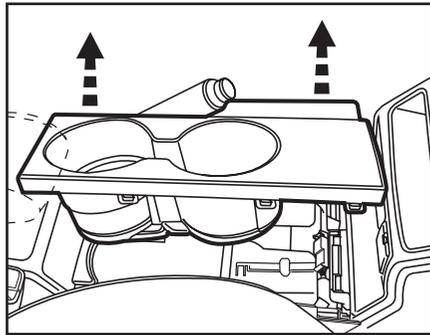

(Figure A)

1. Unclip and remove the cup holder panel in the center console. (Figure A)

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*